

Twist-Lock® Devices  
 20A, 125V AC, 2 Pole, 3 Wire Grounding  
 Valise® Plug

# HUBBELL

## Features

- One piece all-black body design uses less fasteners for ease of assembly
- Powerful cord grip prevents conductor slippage and strain on wiring terminals
- Totally insulated impact and crush resistant nylon body
- Unique patented clamp type terminals provide a superior electrical connection by bundling the conductor strands when clamps are tightened

## Ordering Information

Description	Cord Diameter	UPC	Catalog Number
Black nylon.	.325"-.720" (8.26-18.3)	783585043005	HBL2311VBK

## Listings

Listed to UL 498  
 Fed.Spec. W-C-596  
 Certified to CSA C22.2 No.42

## Specifications

Housing	Black nylon
Blades	Brass
Terminal Screws	#8 - 32 Steel (Philips / Slotted / Robertson)
Terminal Clamps	Steel - Nickel plated
Clamp Screws	#8 - 32 Steel - Zinc plated (Philips / Slotted / Robertson)

## Performance

### Electrical


Current Interrupting	Certified for full rated current
Dielectric Voltage	Withstands 2,000V minimum

### Mechanical

Terminal Accommodation	#18 AWG - #10 AWG stranded copper wire only.
------------------------	----------------------------------------------

### Environmental

Flammability	HB or better per UL 94 or CSA 22.2 No. 0.6
Moisture Resistance	IP20 Suitability
Operating Temperatures	Maximum Continuous 75°C Minimum -40°C (w/o impact)
Terminal Identification	Terminals identified in accordance with UL 498

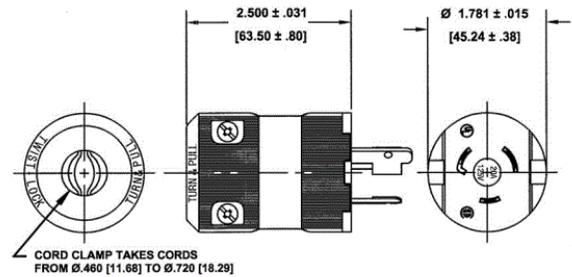

## Accessories

Connector	HBL2313VBK
Single Receptacle	HBL2310
Flanged Receptacle	HBL2316
Weatherproof Boot	HBL60CM31V

## Resources

Customer Use Drawing  
 eCatalog

Dimensions in Inches (mm)

Hubbell Wiring Device-Kellems • Hubbell Incorporated (Delaware) • 40 Waterview Drive • Shelton, CT 06484

Phone (800) 288-6000 • Fax (800) 255-1031 • Specifications subject to change without notice.

